

BrightStrip




Features

- High brightness: up to 325 lumen
- Easily customized for length with several enclosure options
- Energy efficient
- Long life with zero maintenance
- Full conformal coating assures long term environmental performance- Passed Mil-Std-883 testing
- Easy installation with no worries on heat sink arrangements
- UL48 compliant 12V system
- Single row of BrightStrip lights a 12" wide channel letter

Applications

- Closed face channel letters
- Box signage
- Emergency lighting
- Under counter or cabinet lighting
- Architectural lighting
- Halo lighting
- Point of sale
- Accent lighting
- Alternative to fluorescent lighting
- Cold refrigeration
- In-store fixtures
- Wall washes
- Skirt lighting

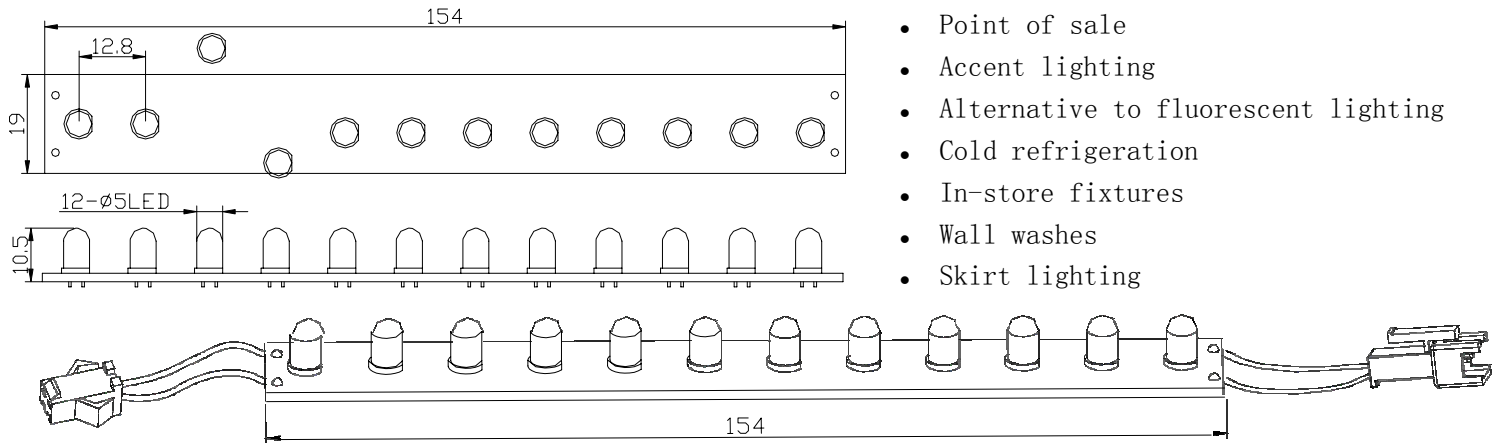

Part No.	Color(X)	Beam Pattern (Viewing Angle)	Light Output (Lumen)	Input (V AC)	Current (Amps)	Power (Watts)	Length (mm)
ML-MAL15A-LL1	A=Amber G=Green B=Blue	15 ⁰ typ	6	12	0.06	0.72	154
		15 ⁰ typ					
		15 ⁰ typ					
FJ-L15R-LL1	R=Red	15 ⁰ typ	8.5	12	0.06	0.72	154
FJ-L15W-LL1	W=White(see below for color temperature)	15 ⁰ typ	16.5	12	0.06	0.72	154

Color Code : 5000K