



Back light modul specification

Features

- Can carry out local lighting according to the illumination space of anomalous different type
- Space shallow narrow ideal illumination light source
- Easily customized for length with several enclosure options
- Easy installation with no worries on heat sink arrangements(paste)
- Energy efficient
- Long life with zero maintenance
- UL48 compliant 12V system
- Produce with new polyester material and the resin of high polymer, have water proofing property and cold-resistant high temperature resistant characteristic

Applications

- Advertising word
- Mark advertising case

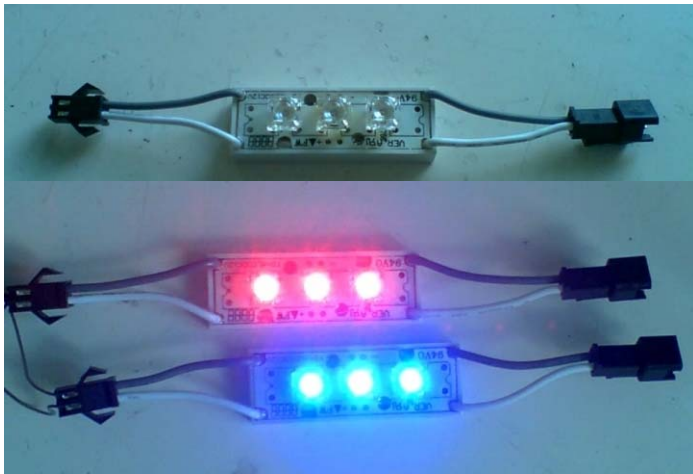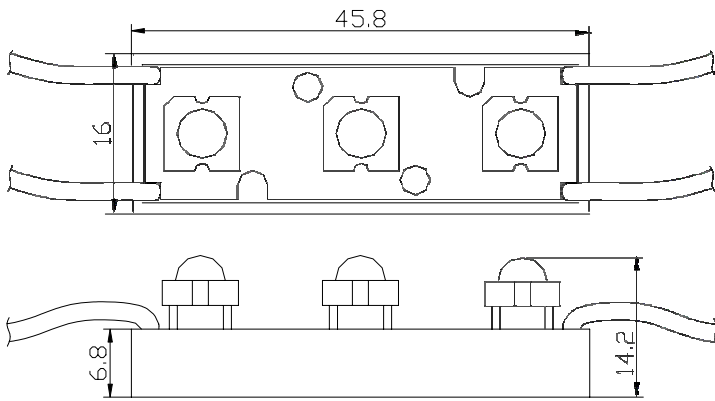

Part No.	Size	Voltage	Current	Power	Color	Housing	Luminous flux	LED QTY
ML-MAL04R-FL1	45.8×16×6.8mm	12 VDC	20 mA	0.24 W	Red	ABS	4.5 lumen	3 PCS
ML-MAL04P-FL1	45.8×16×6.8mm	12 VDC	20 mA	0.24 W	Green	ABS	6.8 lumen	3 PCS
ML-MAL04B-FL1	45.8×16×6.8mm	12 VDC	20 mA	0.24 W	Blue	ABS	2.1 lumen	3 PCS
ML-MAL04Y-FL1	45.8×16×6.8mm	12 VDC	20 mA	0.24 W	Yellow	ABS	3.4 lumen	3 PCS
ML-MAL04W-FL1	45.8×16×6.8mm	12 VDC	20 mA	0.24 W	White	ABS	11.4 lumen	3 PCS